

# SCULPTOR

STREET LIGHTING ROAD HM

ARQUILED presents the **SCULPTOR 100** and **SCULPTOR 200**, a range of LED luminaires designed for high energy efficiency, with a wide range of power consumption.

This range is based on a modern aesthetic of streamlined lines and smooth body, thus not allowing the accumulation of dust or dirt and ensuring a high performance and long-life span. This is only possible thanks to the innovative technology developed in-house by ARQUILED engineers, which allows heat dissipation without any visible fin. And thanks to its die-cast aluminum body, it has an extremely optimized dimension-to-weight ratio.

## HIGH ENERGY EFFICIENCY IN STREET LIGHTING

- Wide range of photometric data and power consumption.
- High-power LED, and others
- High luminous efficiency: up to 159 lm/W
- Excellent light quality: IRC  $\geq$  70
- Energy efficiency up to 80%
- Compatible with a wide range of connectivity solutions for Smart Cities
- Dimming control options: integrated or external via NEMA or Zhaga connectors
- Maximum luminous efficacy throughout the entire life cycle

## APPLICATION AREAS

- Rural, urban, and residential areas
- Pedestrian paths and highways
- Parking lots



## MULTIPLE OPTIONS

### DESIGN

- Die-cast aluminum
- High thermal dissipation
- High mechanical impacts protection



SCULPTOR 200

### OPTICAL AND ELECTRONIC UNIT

- High level of protection in the LEDs module compartment
- High level of protection in the driver's compartment, and network connection




SCULPTOR 100

### ANGLE ADJUSTMENT

- Independent regulation: from  $-15^{\circ}$  to  $+5^{\circ}$  (in  $5^{\circ}$  steps)

### SMART READY

- Lighting control and dimming: ECCOS Embedded
- External control and dimming (NEMA or Zhaga): ECCOS Controller
- Zhaga Sensors

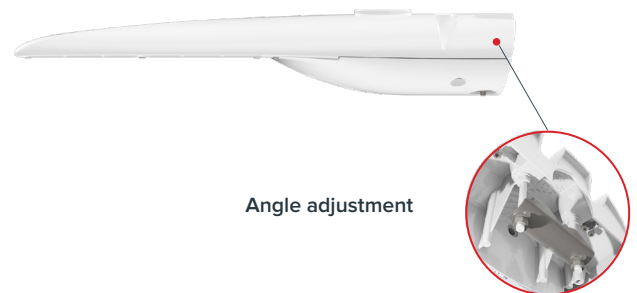

Angle adjustment



## PRODUCT MODELS

	SCULPTOR 100   200
Power consumption <sup>1</sup>	5 - 160 W (depending on configuration)
Luminou flux <sup>1</sup>	678 - 22,296 lm
Luminous efficiency	Up to 159 lm/W



Version with adapter for NEMA connector  
Also available for Zhaga



## SPECIFICATIONS

Housing	Die-cast aluminum
Product finishing	Polyester coating
Product color <sup>2</sup>	RAL 7035
Diffuser	Tempered glass
Ingress protection (IEC – EN 60598)	IP66
Mechanical impacts protection (IEC – EN 62262)	IK08
Correlated Color Temperature (CCT)	2200K / 2700K / 3000K / 3500K / 4000K <sup>2</sup>
Chromatic Restitution Index (CRI)	≥ 70 <sup>2</sup>
Lumen flux maintenance at 100,000h	> 95% <sup>3</sup>
Nominal voltage	230 V / 50 Hz
Surge overvoltage protection (EN 61000-4-5)	4 kV / 10 kV
Electrical class	Class I / Class II
Driver <sup>4</sup>	ON-OFF / 0-10 V / DALI / DALI 2
Connectivity (optional)	Board embedded 5-pin and 7-pin NEMA connector (ANSI C136.41) Zhaga connector
Smart Cities' solutions (optional)	<b>Integrated management system:</b> ECCOS City <b>Lighting control and dimming systems:</b> ECCOS Single, Street, Embedded, and Controller <b>Pedestrian traffic monitoring and counting system:</b> MYRIAD Counter
Mounting	Lateral mounting (standard) Post-top mounting (with optional accessory)
Inside mounting diameter	ø 32 - 60 mm
Angle ajustement	From -15° to +5° (in 5° steps)

<sup>1</sup> The initial flux, power and energy consumption of the luminaire are indicative values valid for an ambient temperature =25°C and measured at 230V. The actual flux emitted by the luminaire depends on some conditions, such as temperature, and may vary according to the model. The values indicated are subject to technological tolerances, within reasonable variations and the current state of the art.

<sup>2</sup> Other options available on request.

<sup>3</sup> In accordance with IES LM-80 - TM-21.

<sup>4</sup> Specifications vary according to model and configuration.


# SCULPTOR



## DIMENSIONS


### SCULPTOR 100

Standard	125 mm
COMMS. Ready	145 mm
NEMA Ready	172 mm
Zhaga Ready	142 mm









### SCULPTOR 200

Standard	125 mm
COMMS. Ready	145 mm
NEMA Ready	172 mm
Zhaga Ready	142 mm

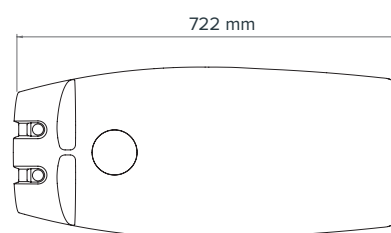

## PHOTOMETRIC DATA<sup>2</sup>

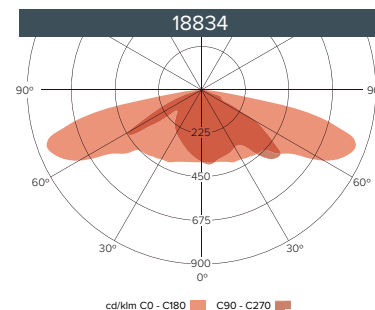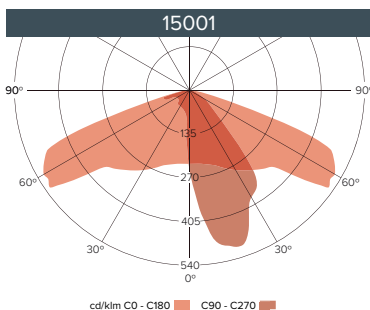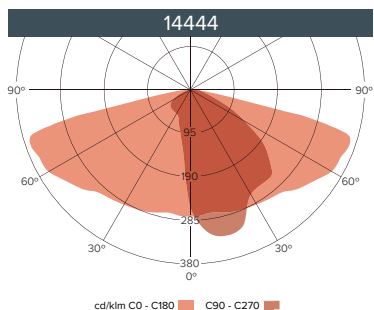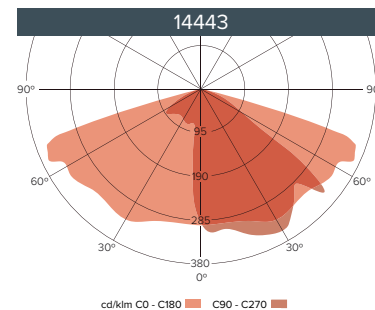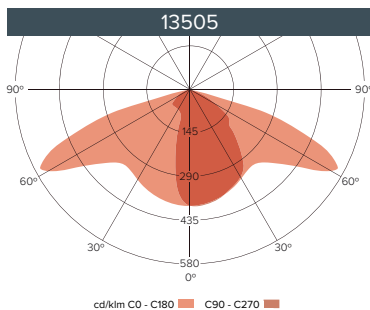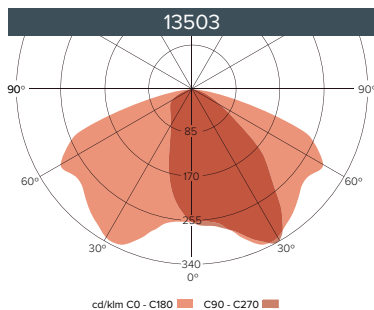

<sup>2</sup> Other options available on request.



## SMART CITIES | IoT CONNECTIVITY SOLUTIONS

### LIGHTING CONTROL AND DIMMING

ECCOS systems are a set of lighting control and light variable intensity (dimming) that offer an adaptable and scalable wide range for each street lighting project needs. From the simplest solution for controlling and scale a luminaire flux intensity, to the most sophisticated remote management systems for street lighting.

Each system is designed accordingly with each municipalities' needs and can go through solutions integrated in the luminaires to external devices (Plug n'Play type), easily coupled to the luminaires.

### INTERNAL STREET LIGHT CONTROLLERS

#### ECCOS embedded

Internal communications module to control and dimming light through a management platform.

#### ECCOS street

Internal dimming device, per group of luminaires, for up to 16 dimming profiles, with a maximum of 10 circuits, that operates the command and control the light intensity of electric micro cuts.

#### ECCOS single

Individual and autonomous control system integrated in the luminaire to set up to 16 factory-defined or customer-defined operating modes in pre-set time slots, without the need for any additional control.

### EXTERNAL STREET LIGHT CONTROLLERS

#### ECCOS controller

External monitoring module (in NEMA socket) to control and dimming light, through a management platform.

### MONITORING AND ACCOUNTING OF FOOT TRAFFIC

#### MYRIAD Counter

Non-intrusive monitoring system of movement flows, duration, and distance of pedestrian traffic operated by a WiFi® range of sensors. The system collects the data and allows to make data analysis almost instantaneously.

The sensor network can be installed anywhere, with electrical power and communications or based on the street lighting infrastructure - coupled to luminaires with connectivity.

### MANAGEMENT SYSTEMS

#### ECCOS city

Management system, bidirectional and geolocated for street lighting, in a SaaS mode, integrated in the luminaire.

Based on various communication technologies such as GSM / M2M, LoRaWAN® and NB-IoT, among others, it allows to remotely manage the luminaires via web application, with automation tasks and alerts.

The management platform allows the integration with other IoT systems.

2024, ARQUILED, PROJETOS DE ILUMINAÇÃO, SA.  
All rights reserved. All trademarks are acknowledged.  
ECCOS and MYRIAD brands are a trademark user under licence of Bright Science Ltd.  
LoRaWAN® is a trademark used under license from LoRa Alliance®.  
DALI (Digital Addressable Lighting Interface) is a registered trademark of DiiA (Digital Illumination Interface Alliance).  
Specifications valid except for omission or typographical error, subject to change without notice.  
The images presented are for illustrative purposes and may differ from the final product.